

# Tempered Green Primed Door Skins


## Main Features

The fine, densely bonded, wood fibre structure of Tempered Green Primed Door Skins is resistant to abrasion and sufficiently durable for use in semi-protected exterior applications.

In addition, the smooth, prime-sealed face surface provides an ideal base for paint finishing. The door skin primer sealer coating is uniformly applied and eliminates the need for on-site priming. The back surface is characterised by a fine, wire screen texture.

## Tempered Hardboard

- No Formaldehyde emissions
- Made from 100% sustainable plantation eucalyptus
- Can be supplied as FSC or PEFC Certified
- Smooth and polished surface
- Grain-less, no knots or wood irregularities
- Excellent machining properties and durability
- Full range of sizes available
- Available in 3.2mm, 4.8mm and 6.4mm thicknesses

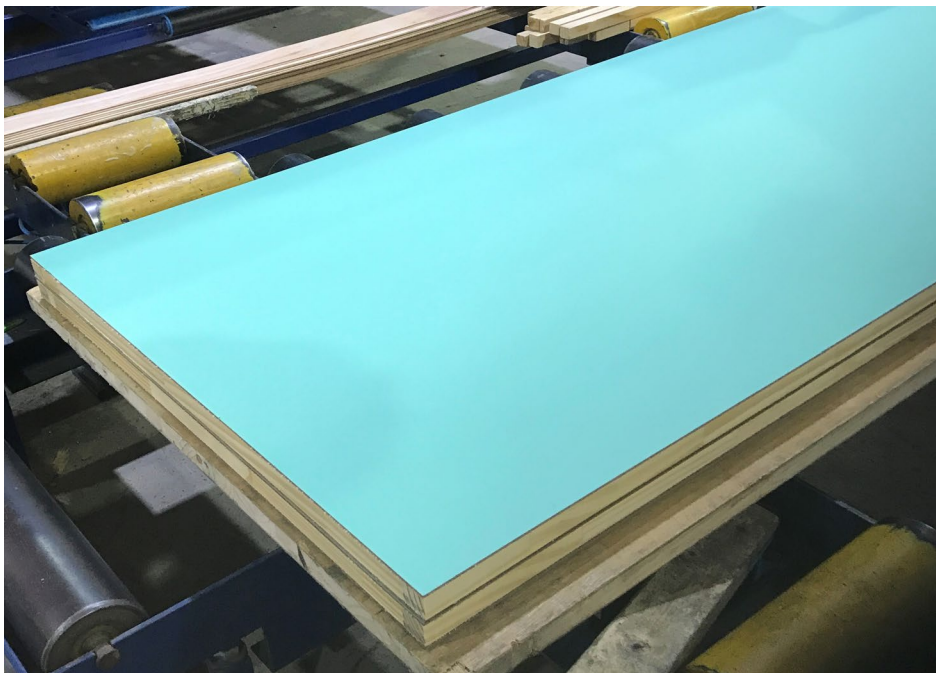

Property	Unit		Typical Value
Thickness	mm		3.2
Thickness Tolerance	mm	±	0.2
Length & Width Tolerance	mm/m	±	1.0
Squareness	mm/m	±	1.0
Mass	Kg/m <sup>2</sup>	approx.	3.2
Density	Kg/m <sup>3</sup>	min	980
Bending Strength (MOR)	MPa	min	50
Thickness swell after 24hrs immersion at 20° C	%	max	16
Moisture Content	%	range	6 - 8